

SPILLSTOPTM

STOP THE SPILL BEFORE IT HAPPENS

PREVENT COSTLY & HAZARDOUS SPILLS WHEN AN AODD PUMP DIAPHRAGM FAILS.



FEATURES & BENEFITS:

- Compatible with all air operated diaphragm pumps from 1/4" (6.35mm) to 4" (101.6mm).
- Attaches directly to air operated diaphragm pump exhaust.
- Fully pneumatic – no batteries or electronics required.
- Optional warning alarm and backup pump switchover.
- Wide range of chemically resistant body materials.
- Variety of standard and ATEX certified models in stock; custom models on request.

SAFETY FIRST:

If an AODD diaphragm fails in an application with dangerous or expensive fluids, there is potential for these to be expelled from the pump's air exhaust, putting employees, equipment and the environment at risk. SPILLSTOP prevents the hazardous spill by safely capturing expelled fluid and shutting down the pump.

CAN YOU AFFORD NOT TO OWN IT?

Unmonitored spills are very costly considering the expense of product loss, system downtime, hazardous clean-up and EPA reporting. By preventing a single spill, the product savings alone would more than pay for your investment in the SPILLSTOP.

ABOUT

SPILLSTOP Pneumatic Version

Being prepared for a system failure or spill is critical. The fully pneumatic SPILLSTOP system safely captures leaked product and automatically shuts down failed pumps to eliminate costly product loss and prevent hazardous spills. Optional warning alarm and backup pump switchover further minimize system downtime for maximum productivity. This unique design is customizable to different material options.



Installing a BLACOH product can prevent and contain inevitable spills and failures to save you thousands.



Example ROI of adding a SPILLSTOP:

Gallons Pumped per Minute	100
Cost per Gallon	\$10
Spill Cost per Minute	\$1,000
+ Additional cost of system downtime, clean-up, EPA reporting, and labor.	



Use our detailed return on investment calculator at Blacoh.com/ROI to discover an estimate of what you could be saving on your personal system.

PNEUMATIC SPILLSTOP™

OPTIONAL ITEMS:


- Pneumatic whistle to sound warning alarm
- Pneumatic-to-electric switch to power warning light, control backup pump switchover, or SCADA control system.
- Customized reclassifier
- Additional shutoff valves for multiple pumps or high suction tank applications



CERTIFICATIONS AVAILABLE:



STANDARD CONFIGURATION:

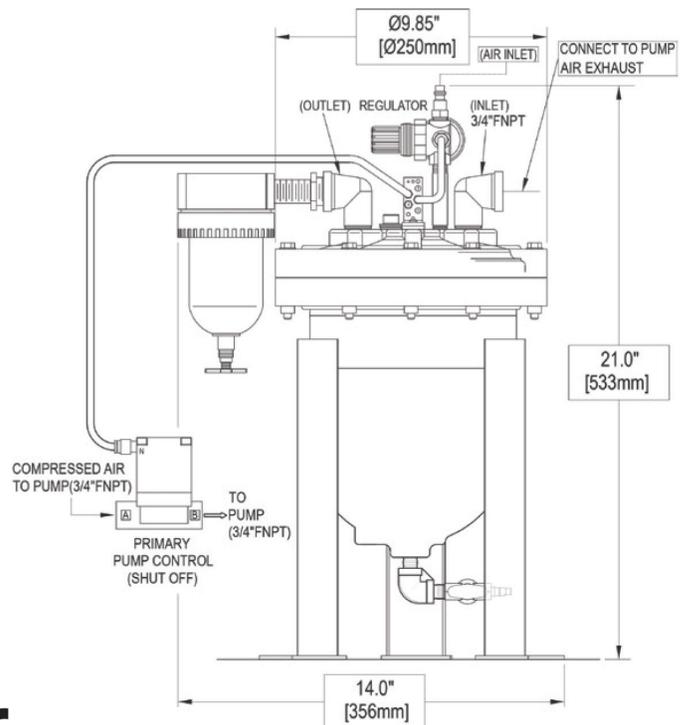

SPILLSTOP SPECIFICATIONS

Body Materials	Lid Materials
<ul style="list-style-type: none"> ■ Polypropylene ■ Stainless Steel ■ PVDF ■ Hastelloy C 	<ul style="list-style-type: none"> ■ Noryl ■ Stainless Steel ■ PVDF ■ PTFE Coated Stainless Steel

Inlet Sizes: 3/4"-1" (19-25mm)

Inlet Types: FNPT or BSP

Personalized configurations to meet your unique system needs are also available. Contact our engineering team for design specifications.

Part of the
BLACOH™
 FLUID CONTROL
 family of products

